



# LED FLEXIBLE STRIPS

Model No. BR-F2835xx240-xx-x-Fx-V<sub>x</sub>



- Energy efficient LED flexible strip for continuous color stability in linear applications.
- Standardized electrical flow over the entire length of the strip for maximum product reliability
- LEDs with ideal color rendering index, high lumen efficiency and no-flicker to give pleasant atmosphere.
- PCB in reinforced copper and double layer FPC for optimum heat dissipation.
- Protected against electrostatic discharge +/- 2000V.
- Extremely flexible lengths for varied architectural applications.
- Features minimizing voltage drop while increasing run lengths per power feed.
- High resistant 3M adhesive tape.

## Product features



**Wattage**  
38.4W/meter



**Luminous Flux**  
4416 Lumen/meter




**CRI**  
CRI>80, CRI>90



**Life Span\***  
30,000 hours  
\*Conditional warranty of 50,000 hours



**Dimmable**  
Dali/0-10V/Triac/PWM




**Voltage**  
24VDC

BRID SERIES

## Product details

- 20-21 lm/LED chip
- 1200LED, 4.1mm/pitch
- Dimensions: 5,000mm x 12mm(10mm) x 1.5mm (L\*W\*H)
- Up to 115 lm/watt
- Storage temp.: 30<sup>o</sup>-80<sup>o</sup>C
- Operation Temp.: -20<sup>o</sup> 50<sup>o</sup>C
- (24V) Cutting length : 25mm
- (24V) : 6 led per segment

## Binning Chart

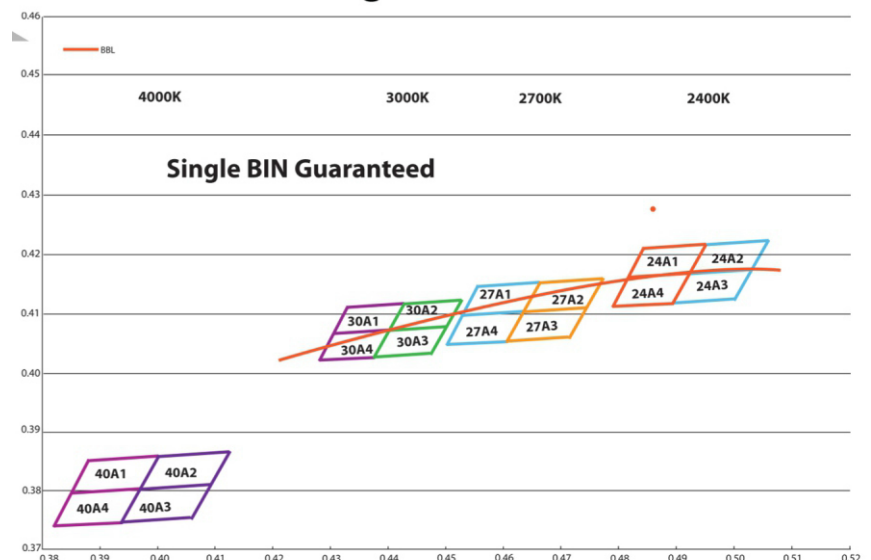

# Models

24VDC, 38.4W/m


Model No	CCT	Flux (Lm/M)	Efficacy (Lm/Watt)	CRI/R9	IP Rating
BR-F2835WW240-20-C-Fx-V <sub>x</sub>	2000K	332 l	86	>80/25	IP20 IP54 IP65 IP66 IP67 IP68
BR-F2835WW240-24-C-Fx-V <sub>x</sub>	2400K	334 l	87	>80/25	
BR-F2835WW240-27-C-Fx-V <sub>x</sub>	2700K	3533	92	>80/>25	
BR-F2835WW240-30-C-Fx-V <sub>x</sub>	3000K	3796	98	>80/>25	
BR-F2835NW240-40-C-Fx-V <sub>x</sub>	4000K	4262	110	>80/>30	
BR-F2835CW240-55-C-Fx-V <sub>x</sub>	5500K	4300	111	>80/>30	
BR-F2835CW240-65-C-Fx-V <sub>x</sub>	6500K	4416	115	>80/>30	

## Order Code


Type	Type of chip	Color	Number of LEDs/meter	CCT	MacAdam	IP Rating	Voltage
F-Flexible R-Rigid	2835	WW : Warm White NW : Natural White CW : Cool White	240	20 : 2000K 24 : 2400K 27 : 2700K 30 : 3000K 40 : 4000K 55 : 5500K 65 : 6500K	C : 3-step Macadam C1 : 4-step Macadam	F0-IP20 F1-IP54 F2-IP65 F3-IP66 F4-IP67 F5-IP68	V <sub>2</sub> - 24V

## Dimensions

IP20 Top View - 24V

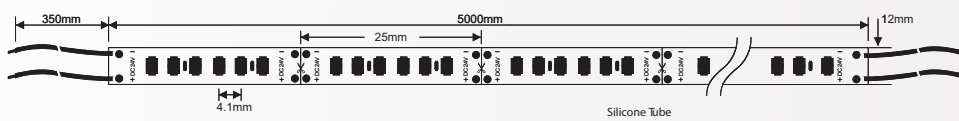


## Side View

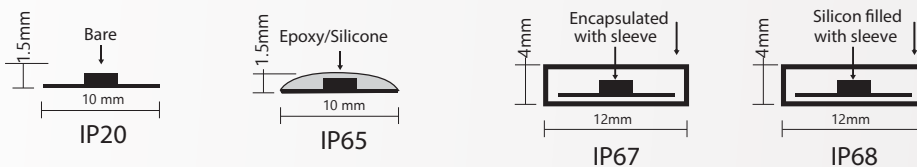

## Photometric Diagrams

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

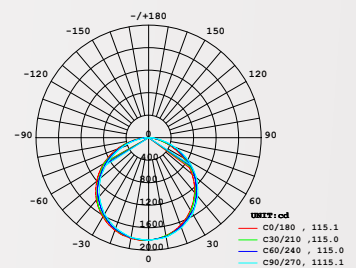

AVERAGE BEAM ANGLE(50%):115.1 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

